


Differential Amplifier Test Setup

Both the Current Mirror Chip and the Differential Amplifier Chips are used.

Measure:


- DC Transfer Characteristic (Plot)
- ADM
- SR
- ACM
- CMRR
- GBW
- p1

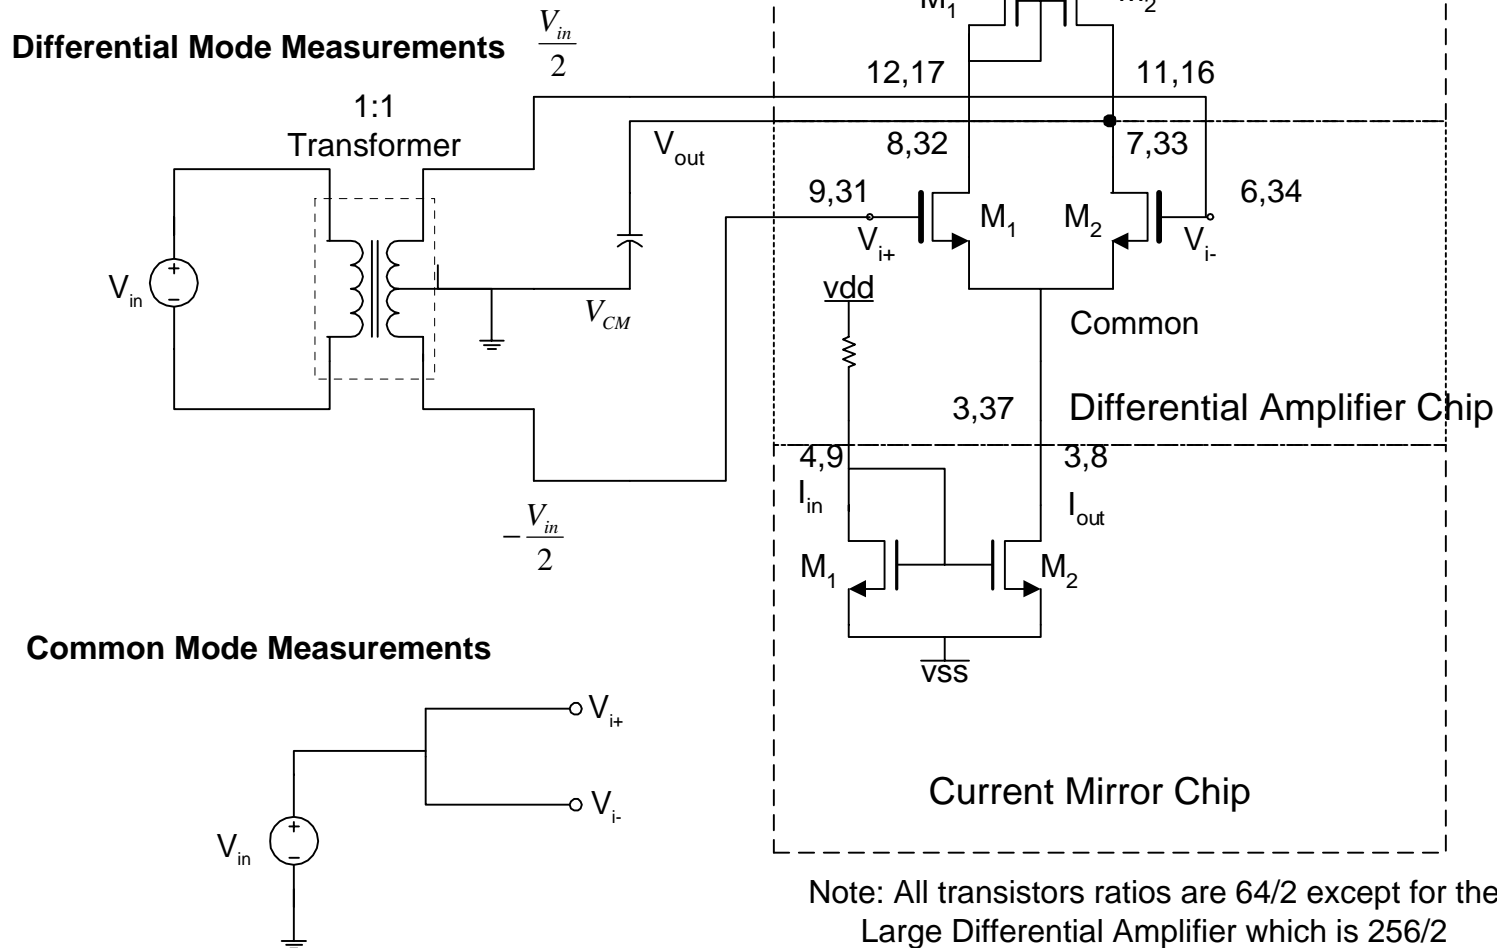

Only Bias the Current Mirror Chip.
vdd->5,10,15
vss->25,30,35


DC Response

1

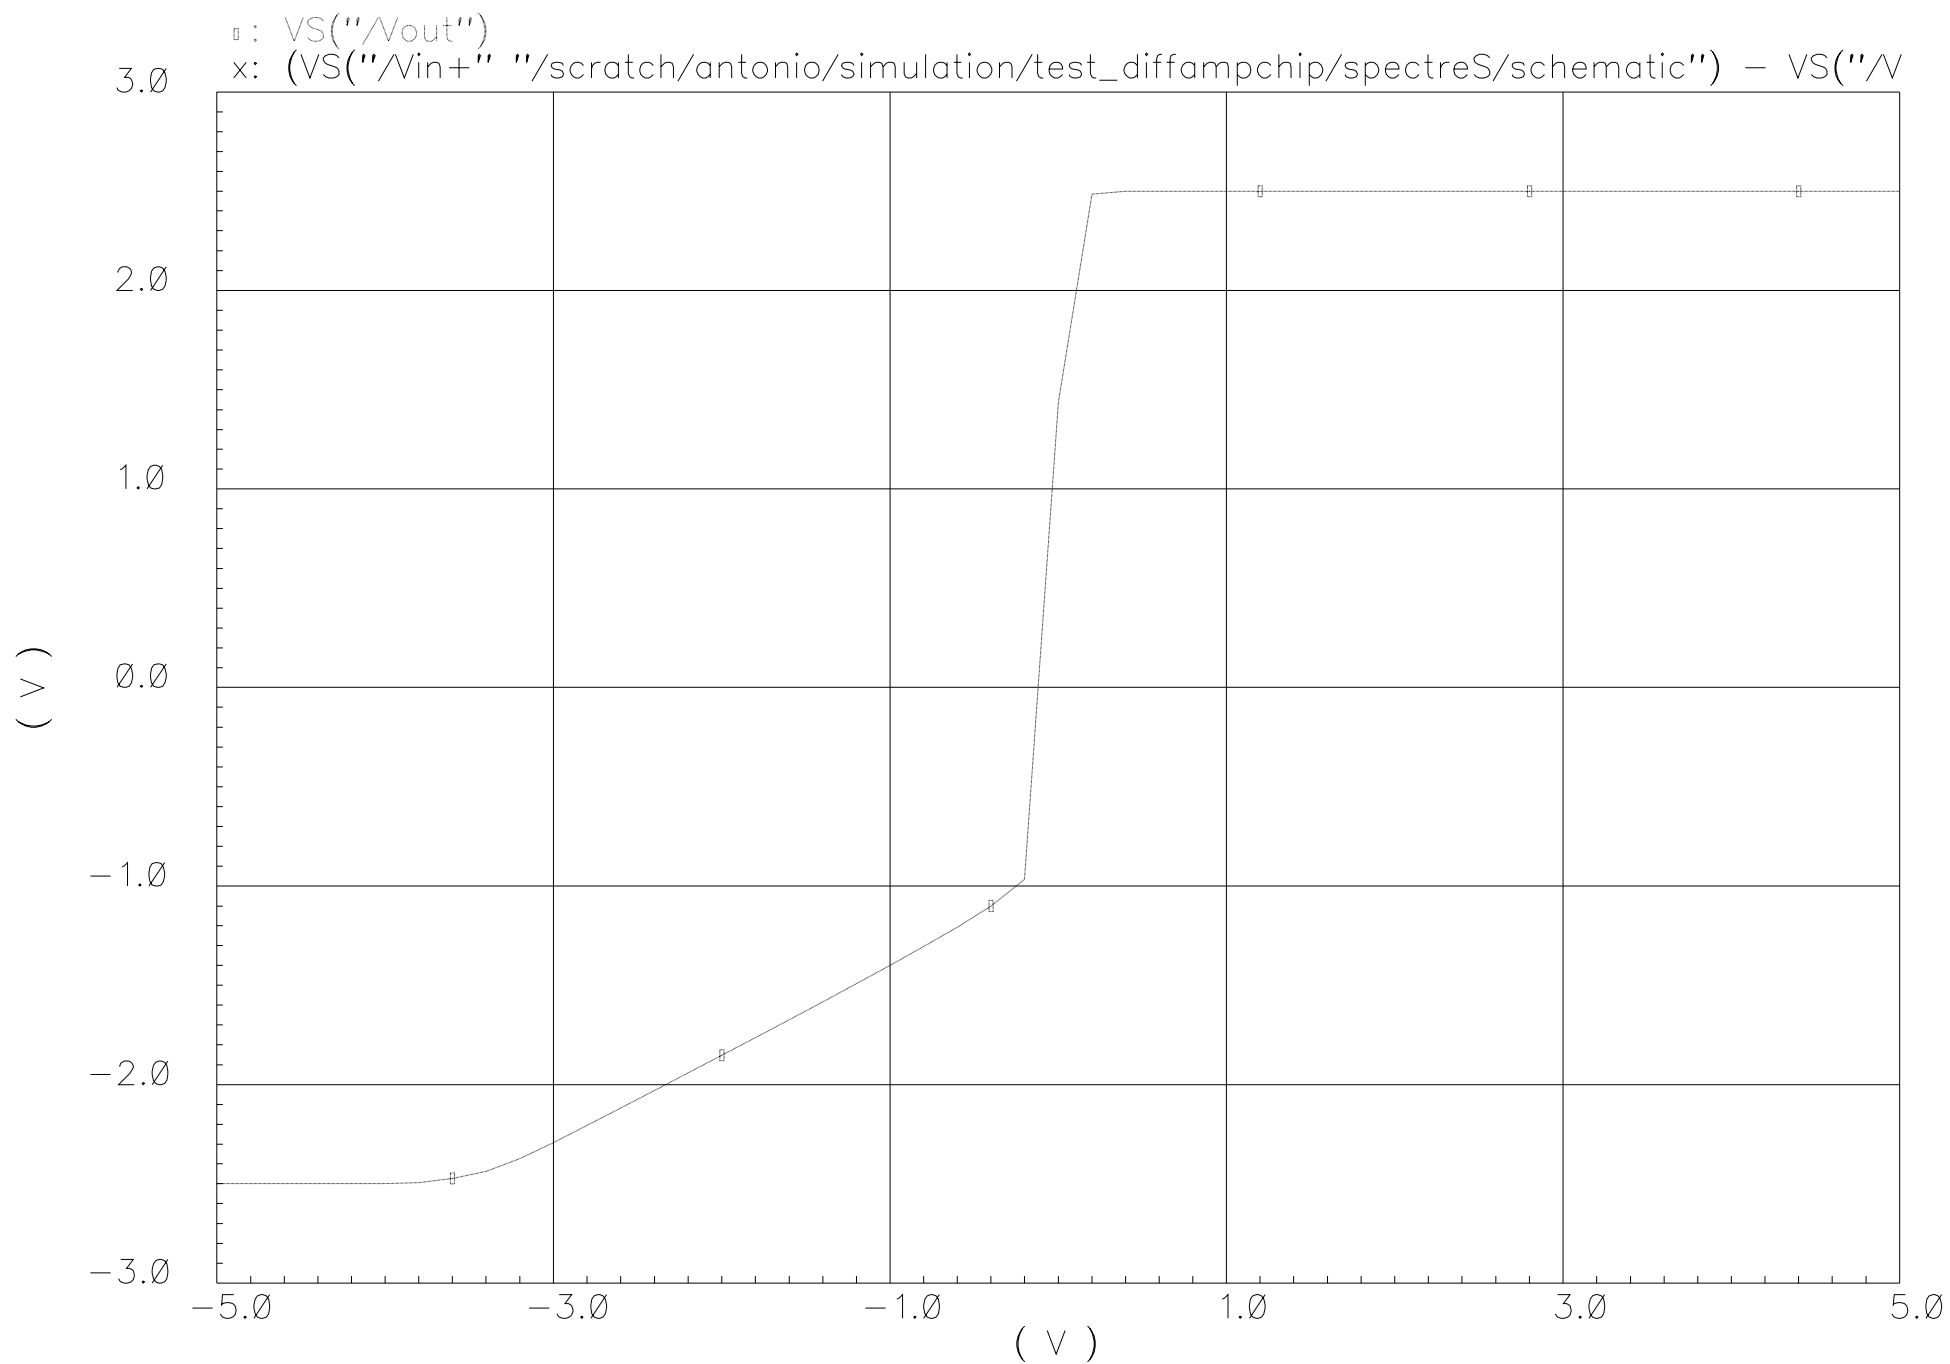

Transient Response

1

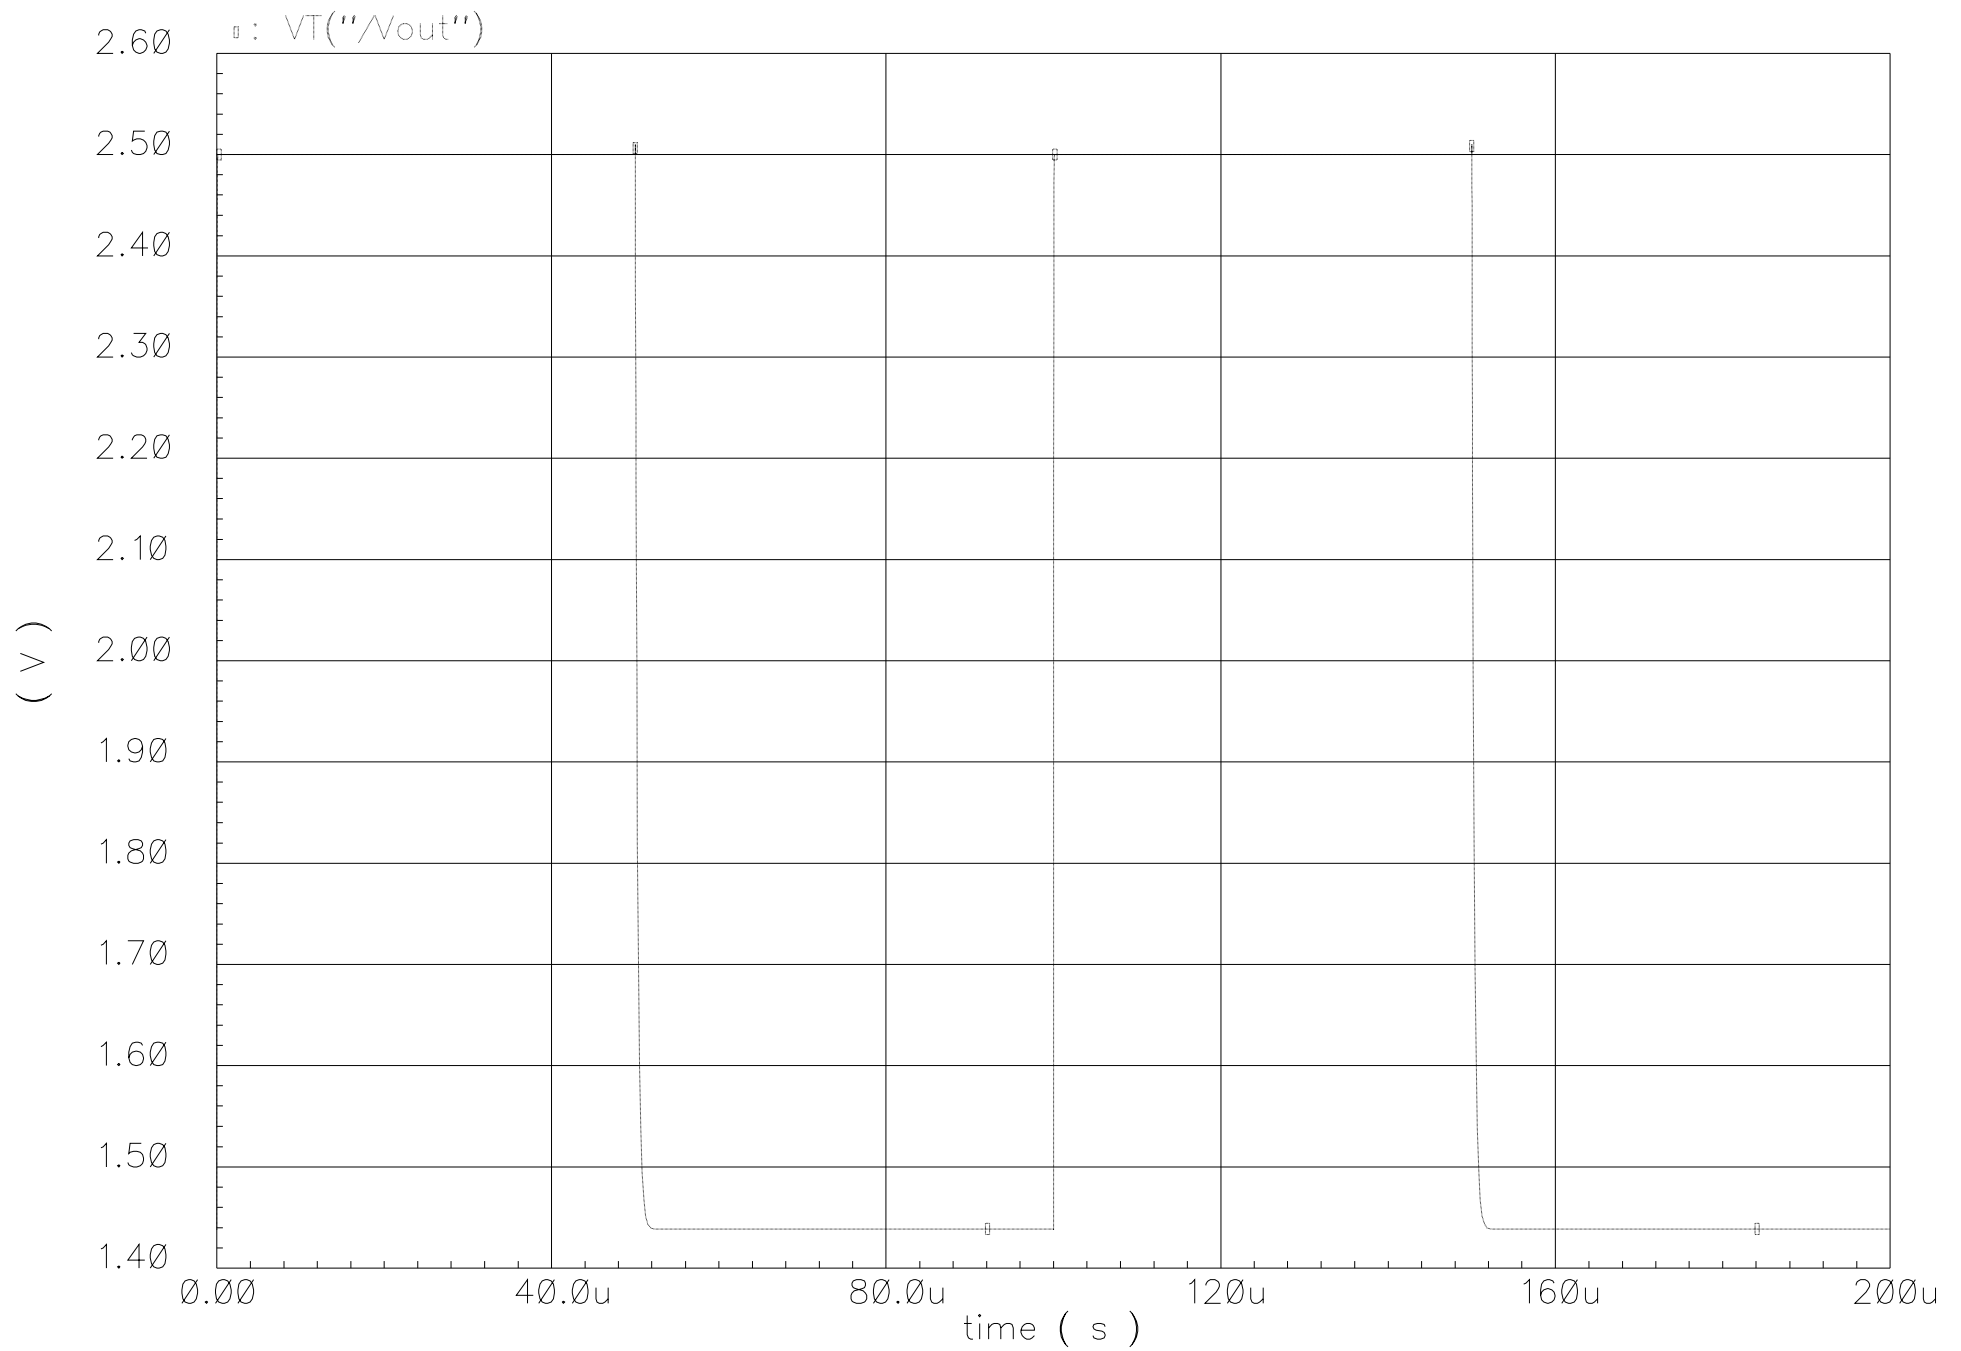

AC Response

1

